



Power is knowledge.

LifeSafety Power®

BRIVO LSP-DV250

400W / 12 & 24VDC / Up to 20 Doors
16 Lock Control and 16 Auxiliary Outputs
(10) ACS5000 series boards

Overview

BRIVO unified power systems are engineered to house LSP power modules alongside Brivo access hardware in one compact, secure system.

This unit is a 12V and 24V DC dual voltage network managed access power system.

Dual C8 lock control modules provide sixteen access control inputs capable of voltage or dry contact activation, and sixteen outputs programmable for failsafe / failsecure operation at either 12 or 24 VDC and controlled by the integrated fire alarm interface circuit on the FPO. Two D8P modules provides sixteen auxiliary class II power limited outputs and each output is configurable for 12 or 24VDC operation.

Enclosures are painted steel with removable backplate and include lock, two (2) keys and tamper switch

System Features

- ◆ **FPO offline power supply**
 - 120 or 230 VAC input
 - 12 and 24 VDC outputs
 - On board Fire Alarm Interface
 - Continuous and resettable DC
- ◆ **Distributed outputs**
 - 16 auxiliary, power limited at 2.5A each
 - 16 control - fused at 3A each
- ◆ **Expansion options**
 - Increased power, multiple voltages
 - Additional distribution outputs
 - Network monitoring and reporting
- ◆ **Lifetime Warranty**

Enclosure Features

- ◆ **Labor saving design**
 - Pre-wired power section
 - Pre-punched knockouts
 - Removeable backplate simplifies installs
 - Pre-defined hole pattern for power section
 - Access panels mount on threaded standoffs - no drilling required
- ◆ **Additional benefits**
 - Wire management room
 - 4.5" enclosure depth fits battery set
 - Tamper switch, lock, dual key set standard
 - Mounting hardware for access boards included



Ordering

LSP-DV250


Description

400W (12V & 24V) 16 control/aux outputs, ntwrk

Specifications

Input Power	Input 120/230 VAC 50/60 Hz 564 Watts Overload and short circuit protection Over temperature protection Polarized AC power supply disconnect
Output Power	PS1: FPO150: 12V/12A or 24V/6A 150 Watts PS2: FPO250: 12V/20A or 24V/10A 250 Watts Outputs: Continuous (DC1) Resettable (DC2) 16 control lock control outputs fused at 3A per output 16 auxiliary outputs class II power limited at 2.5A per output 120 mV output voltage ripple System Efficiency: 87% System BTU Rating: 155 BTU/Hr
Battery Charging	Independent built-in 2A charger for sealed lead acid or gel type batteries Microprocessor dual rate charging of 12 or 24 V battery sets Charges up to 80Ah battery sets within UL limit Automatic switchover to standby battery when AC fails Zero voltage drop when switched over to battery backup
Supervision	AC Fail (form "C" contacts) System Fault (form "C" contacts) may be triggered by low/no battery, short to earth ground, power supply failure or blown fuse
Visual Indicators	AC input, DC1 and DC2 output System fault / AC fault Short to earth ground Reverse battery polarity Fire Alarm Input activated D8P: DC outputs C8: DC input, output and fault
Regulatory Compliance (LSP equipment)	UL294, UL603, UL864, UL1076, UL1481, UL2044, UL2572 ULC S318, ULC S319, ULC S527, CSA C22.2 #107.1, CSA C22.2 #60950 FCC Part 15, Subpart B / CSFM Approved
Enclosure Dimensions	Size: 36.00H x 30.00W x 4.50D in. (91.00 x 76.00 x 11.50 cm) Weight: 90 lbs.
Access Panel Mounting	(10) ACS5000 series boards

Backplate mounting pattern for power and access boards

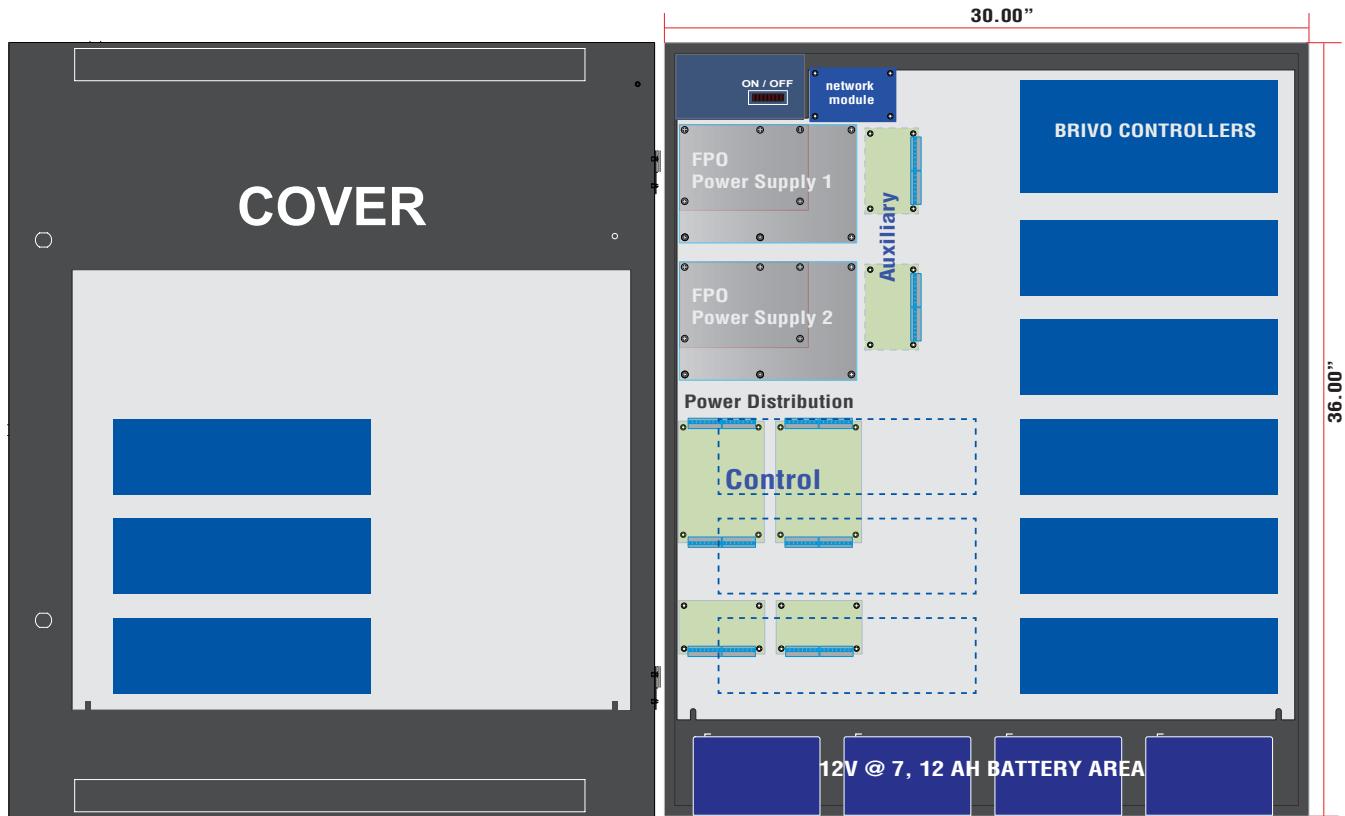

lifesafetypower.com

(888) 577-2898
info@lifesafetypower.com

Specifications subject to change without notice.

© 2016 LifeSafety Power Inc. All rights reserved. LifeSafety Power and FlexPower are registered trademarks of LifeSafety Power Inc. All other trademarks and copyrights are the property of their respective owners.

P01-809A 04/16

LifeSafety Power, Inc.
750 Tower Road, Unit B
Mundelein, IL 60060 USA